

Executive Summary

Proposal for Techopoly

By ShoemakerIT LLC.

Techopoly has requested a bid for the installation of their network services in their new headquarters in Dayton, OH. ShoemakerIT LLC proposes the following.

The facility is a 50,000 square foot structure with T3 fully terminated in the building . The T3 will be connected to a SonicWall® TZ270 Firewall that filters all inbound and outbound internet traffic for the facility. The firewall will connect to a 48-port Netgear® unmanaged switch. That 48-port switch will connect to a MicroTik® fiber optic switch which will use fiber optic cabling to connect to three Dell® PowerEdge R620 Servers. Each server will have APC® Smart-UPS uninterruptible power supplies in the case of loss of power.


Additionally, the 48-port switch will have wired connections to 30 Dell® Precision T5810 Workstations and 5 HP® LaserJet Enterprise 600 M602dn Laser Printers. Each printer will be distributed across the facility, so each department has easy access to a printer with the ability to scan, copy, fax, and color print. Additionally, the workstations will be distributed among each department according to the needs of the various departments. Each workstation and printer will use GE Surge Protectors to connect to the power.

The total cost of all components, tools, software, hardware, and labor is estimated at a total cost of \$24,393.24 plus the sales tax and shipping charges.


Proposal Parts and Price List

Name	Model No.	Quantity	Pricing
NETGEAR 48-Port Gigabit Ethernet Unmanaged Switch	GS348	1	\$ 279.99
MikroTik 5-Port Desktop Switch, 1 Gigabit Ethernet Port	CRS305-1G-4S+IN	1	\$ 178.90
RamboCables 10ft(3m) LC LC OM2 Fiber Patch Cables	B0B14N2N6H	3	\$ 8.49
Asus 10Gbps Gigabit Ethernet PCI Express Network Card/Ethernet Card	XG-C100F	3	\$ 109.90
SonicWall TZ270 Network Security Appliance	TZ270	1	\$ 310.33
DELL PowerEdge R620 Server	R620	3	\$ 365.00
DELL Precision T5810 Workstation	T5810	30	\$ 159.49
HP LaserJet Enterprise 600 M602dn Laser Printer	HEWCE992A	5	\$ 1,950.00
GE 6-Outlet Surge Protector	14092	35	\$ 13.99
APC Smart-UPS X SMX3000RMLV2U 3000 VA Rack-mountable UPS	SMX3000RMLV2U	1	\$ 2,149.50
Cable Termination and Installation Allotment.			\$ 5,000.00
		Total	\$ 24,393.24


Network Diagram

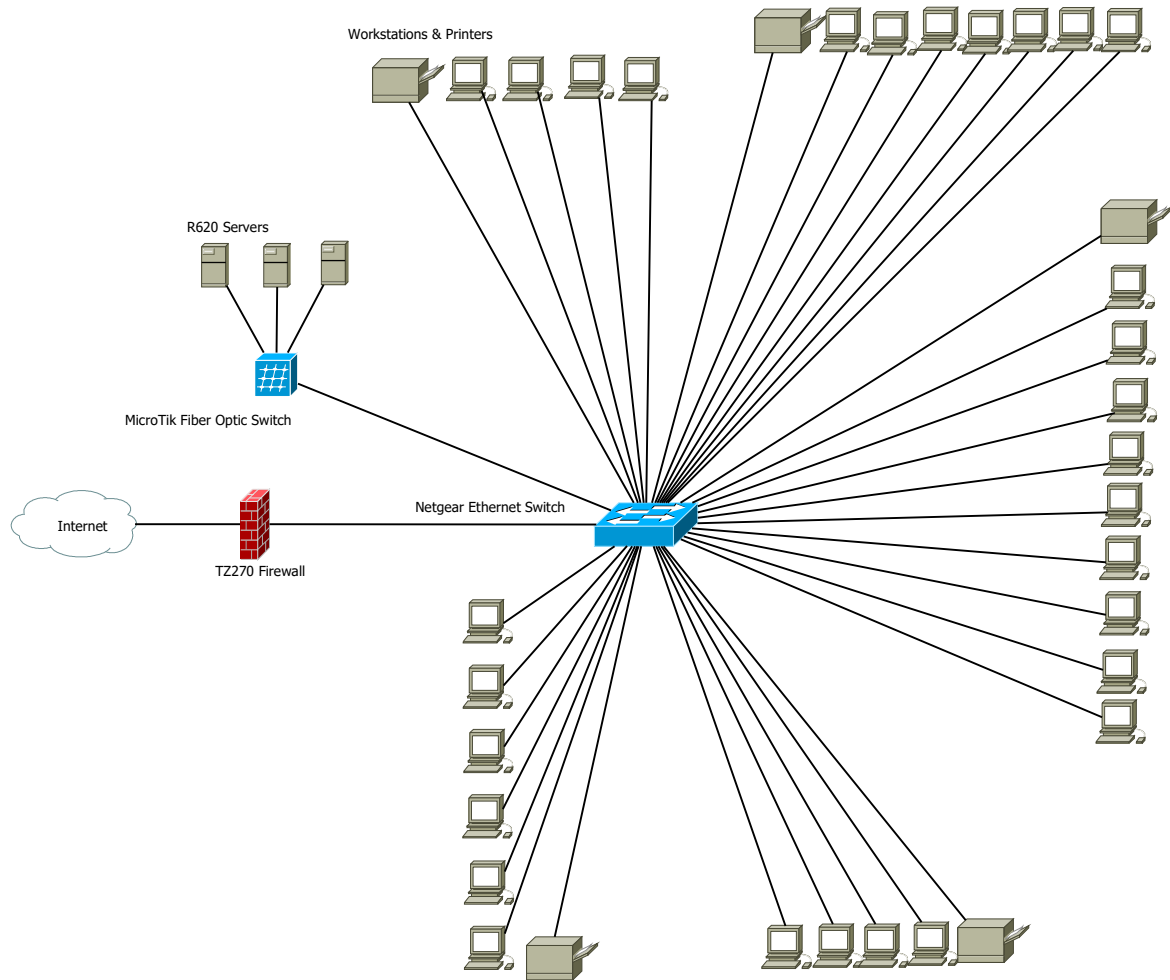

Network Tree

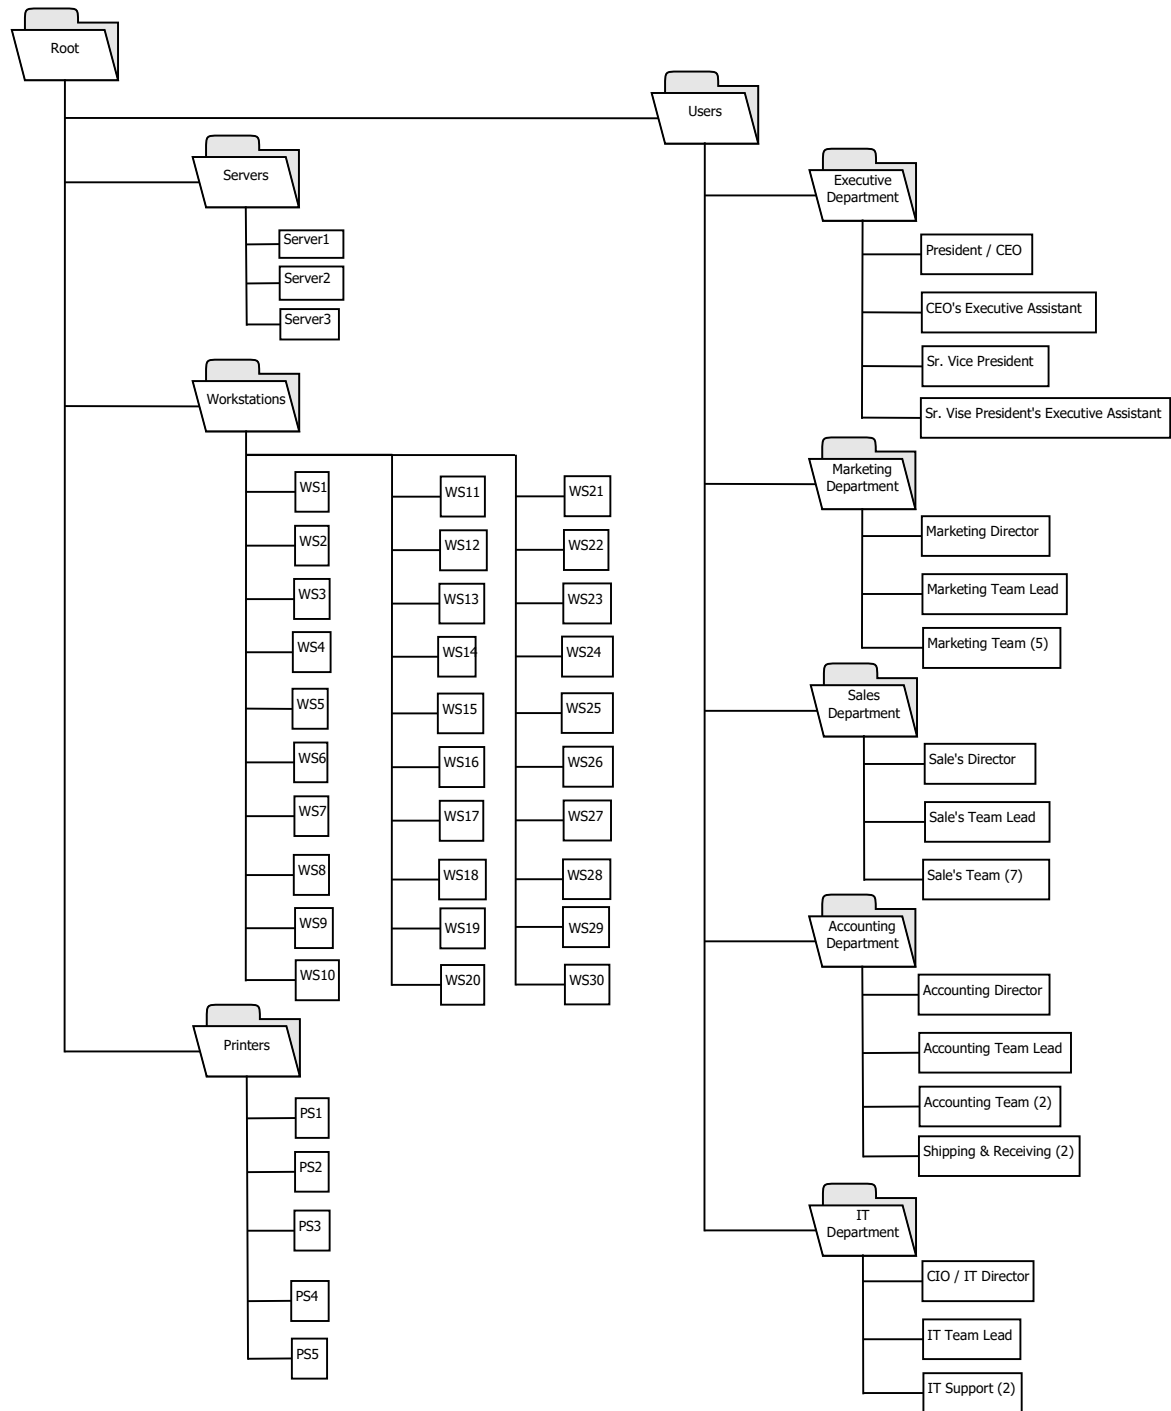

User Diagram

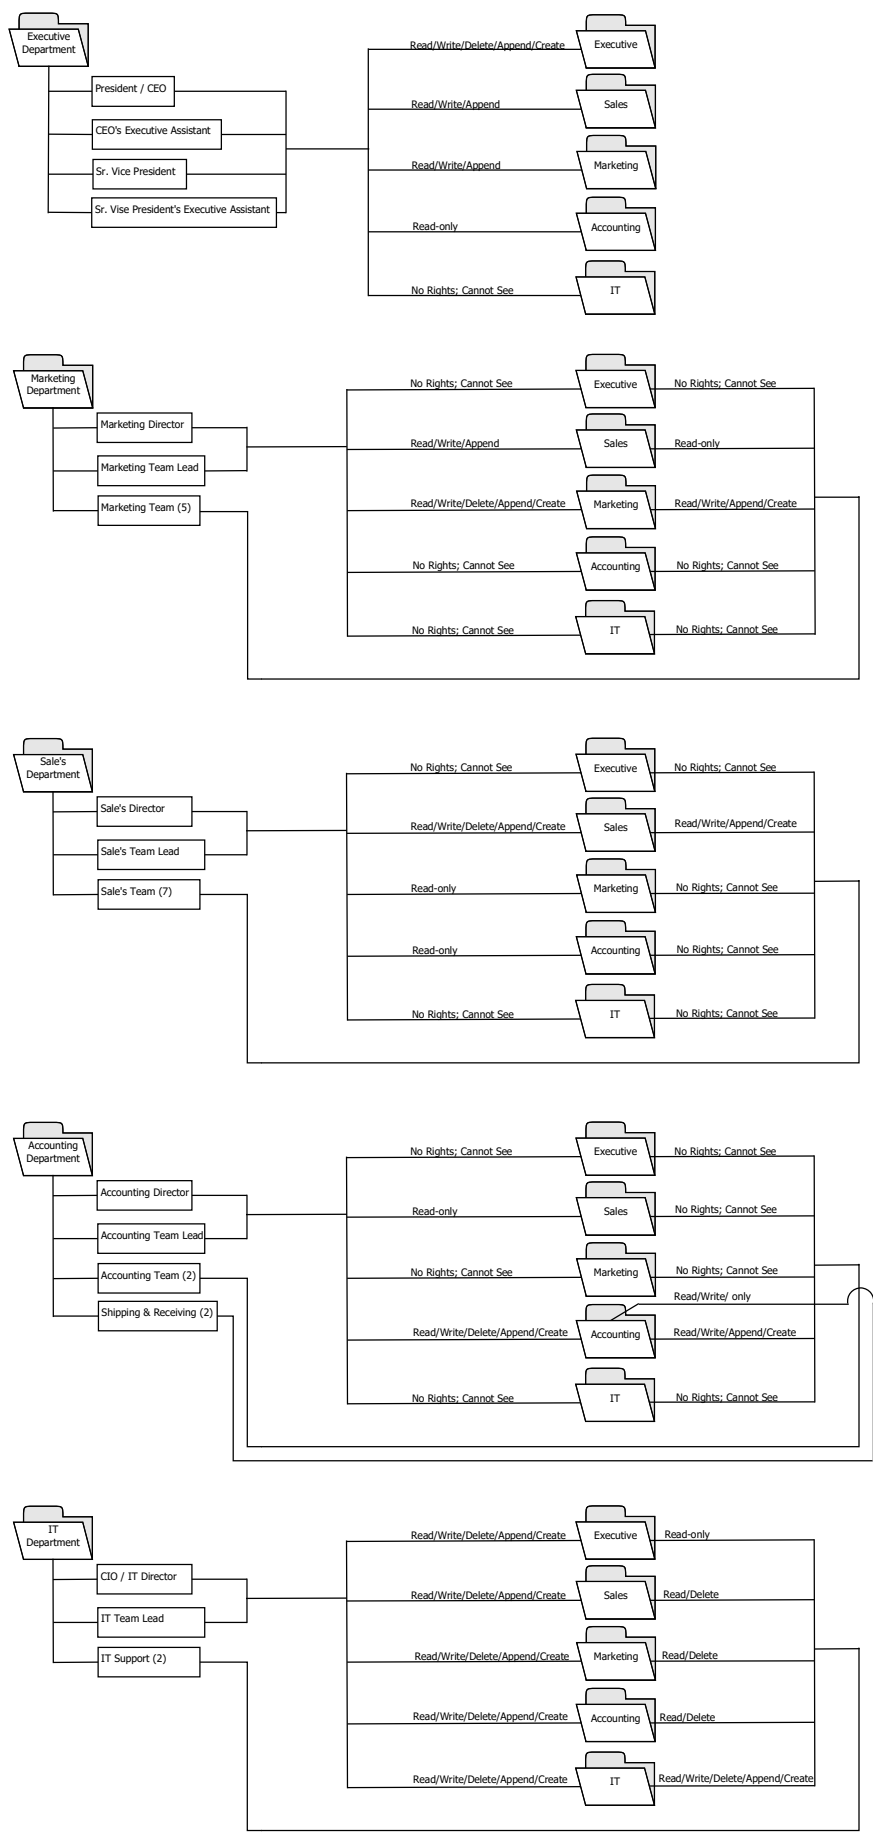

Techopoly Proposal

Andrew Shoemaker

CEG2400

4/18/2024


Executive Summary

- Shoemaker LLC. Proposes the installation of:
 - 30 Dell® Precision T5810 Workstations
 - 5 HP® LaserJet Enterprise 600 M602dn Laser Printers
 - 3 Dell® PowerEdge R620 Servers
 - All network components, tools, software, and hardware including cabling.
 - Estimated cost is \$24,393.24


Price and Parts List

Name	Total Cost
NETGEAR 48-Port Gigabit Ethernet Unmanaged Switch	\$279.99
MikroTik 5-Port Desktop Switch, 1 Gigabit Ethernet Port	\$178.90
RamboCables 10ft(3m) LC LC OM2 Fiber Patch Cables	\$25.47
Asus 10Gbps Gigabit Ethernet PCI Express Network Card/Ethernet Card	\$329.70
SonicWall TZ270 Network Security Appliance	\$310.33
DELL PowerEdge R620 Server	\$1,095.00
DELL Precision T5810 Workstation	\$4,784.70
HP LaserJet Enterprise 600 M602dn Laser Printer	\$9,750.00
GE 6-Outlet Surge Protector	\$489.65
APC Smart-UPS X SMX3000RMLV2U 3000 VA Rack-mountable UPS	\$2,149.50
Cable Termination and Installation Allotment.	\$5,000.00
	\$24,393.24


Network Diagram

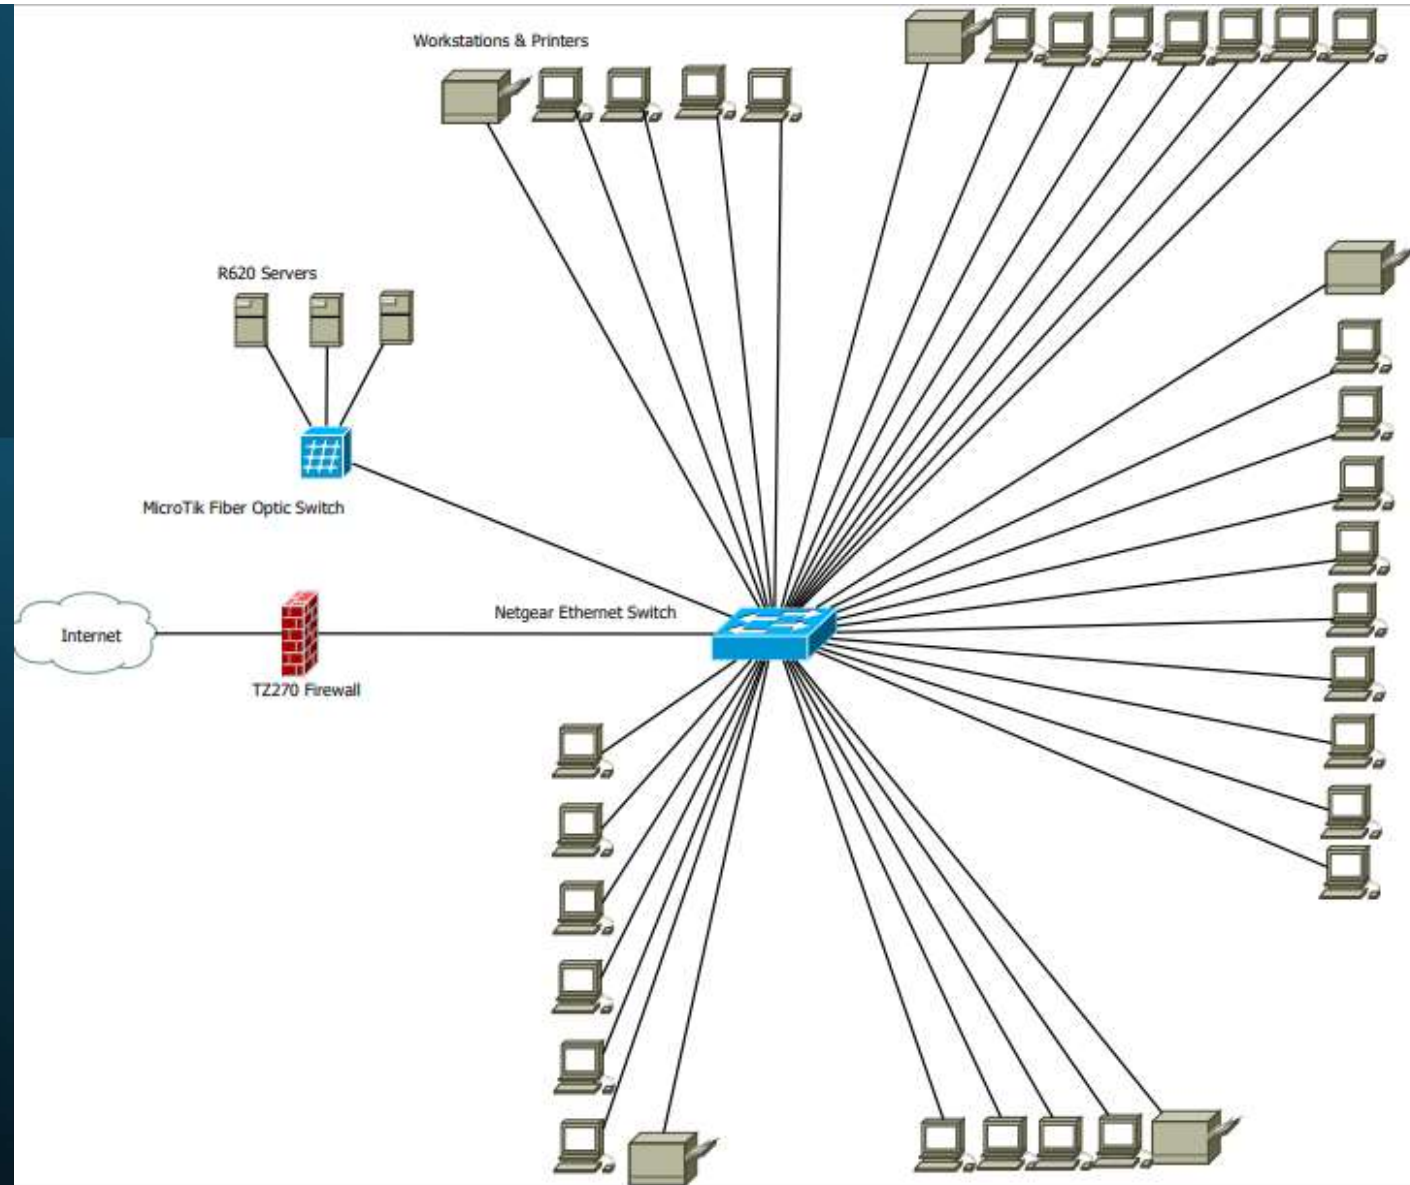


Network Tree

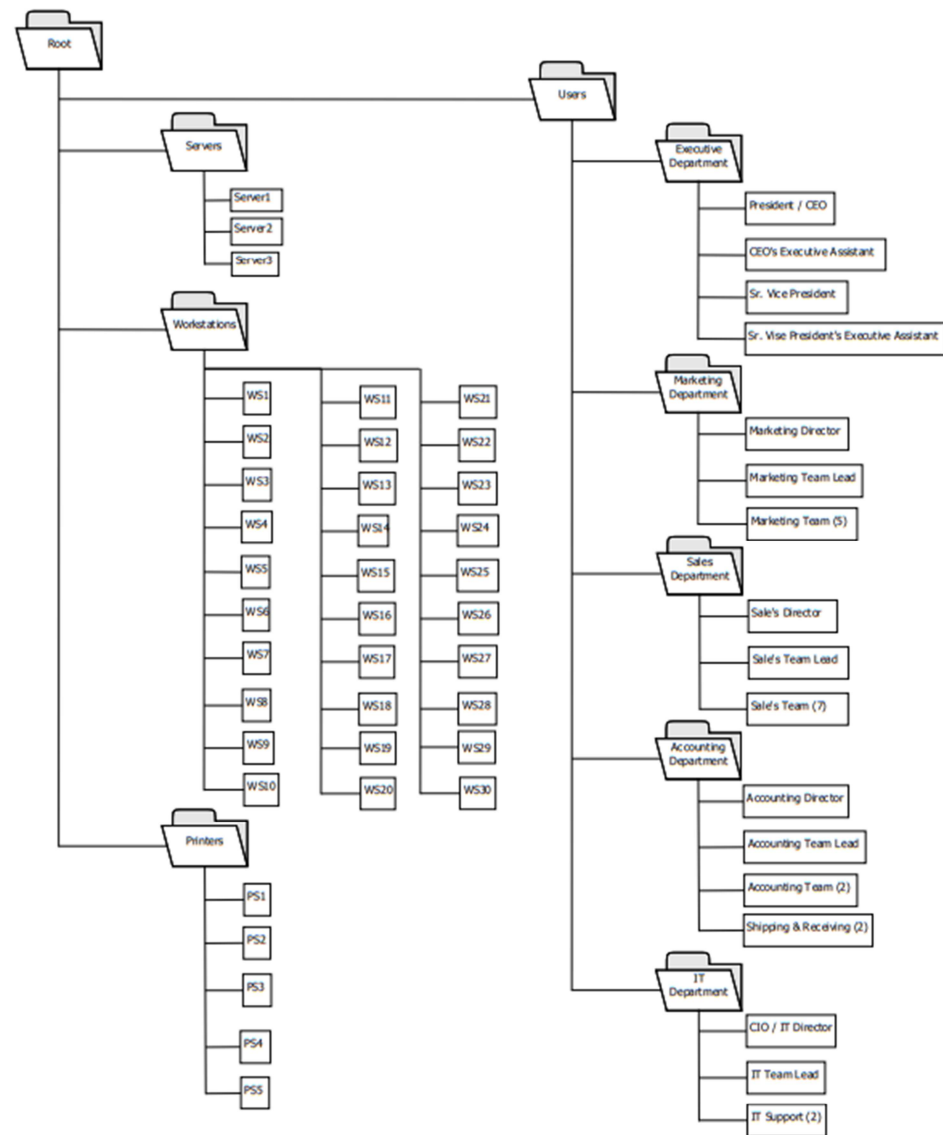


User Diagram

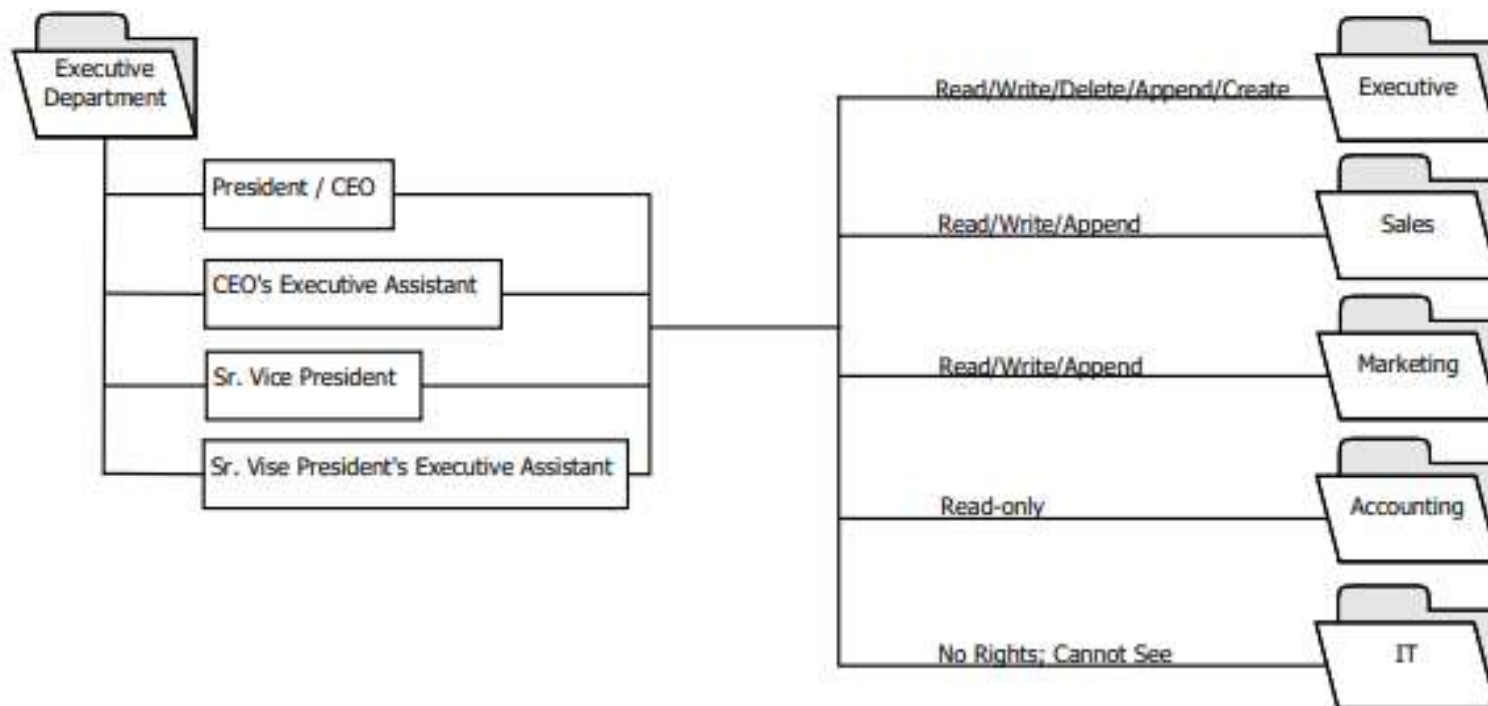


User Diagram

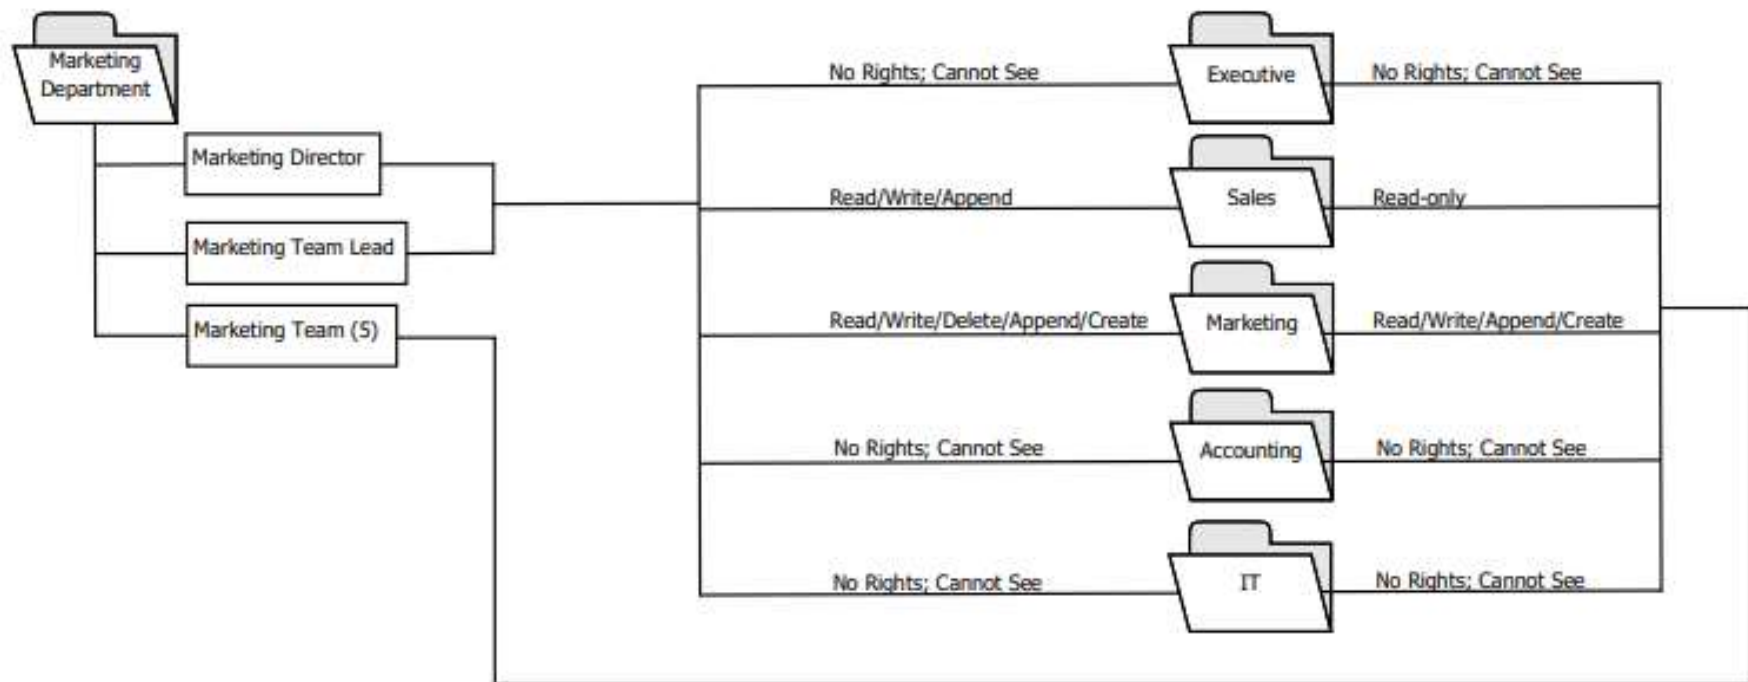

User Diagram

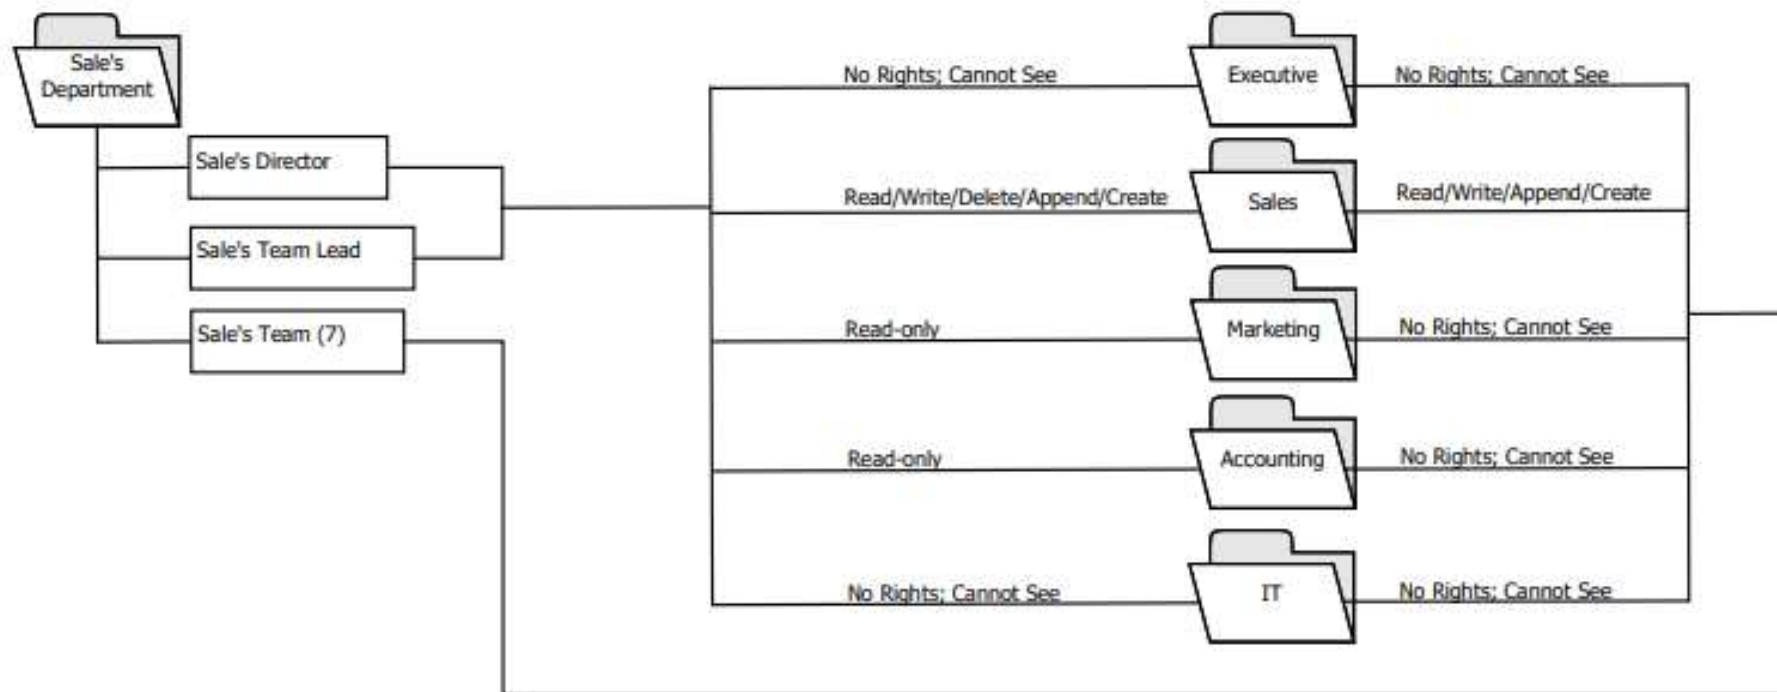

User Diagram

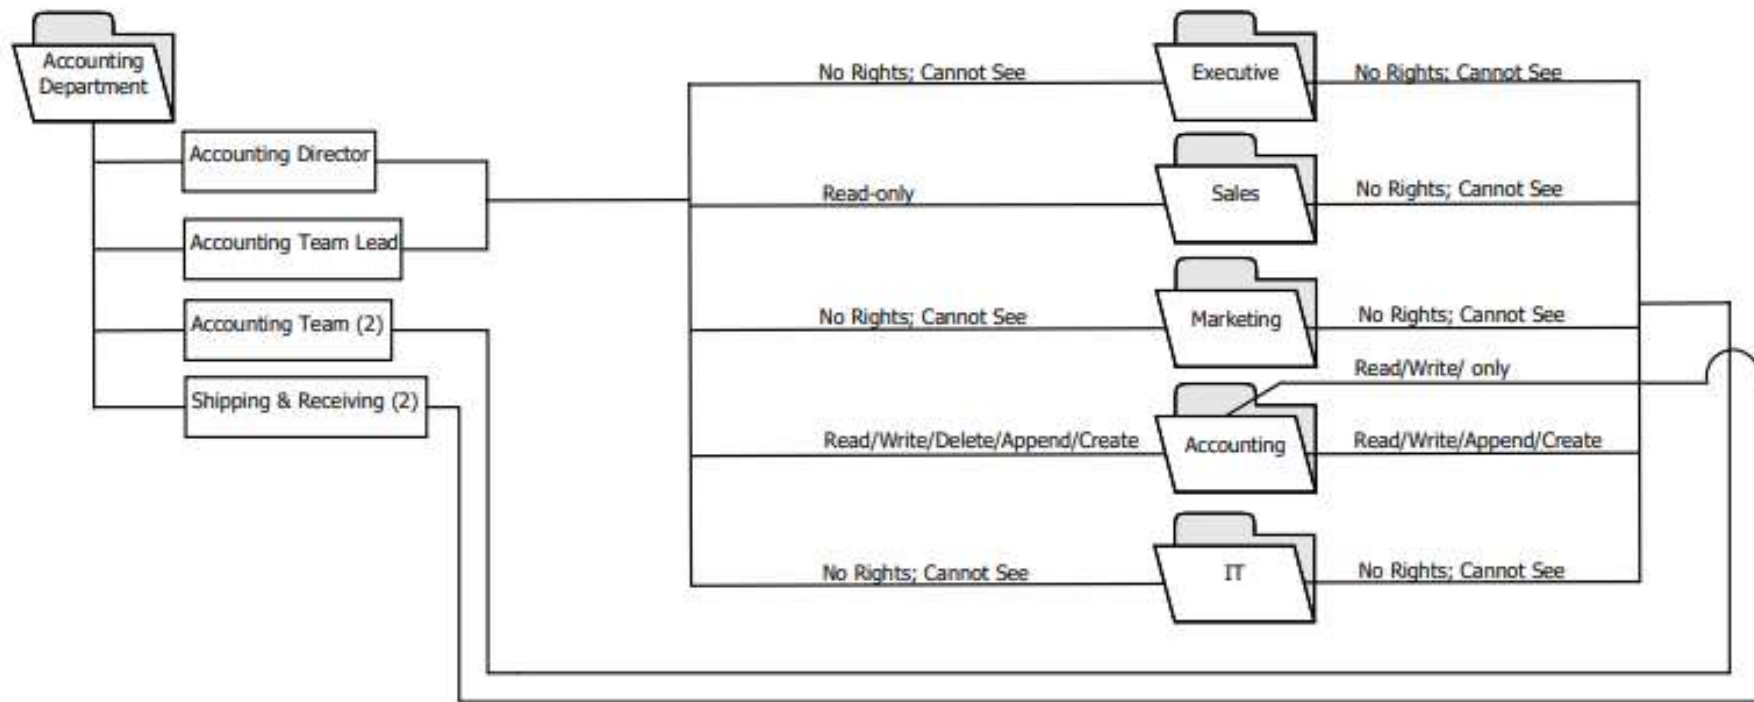

User Diagram

